


KERN ACS 100-4

KERN

The bestseller in analytical balances, with high-quality single-cell weighing system

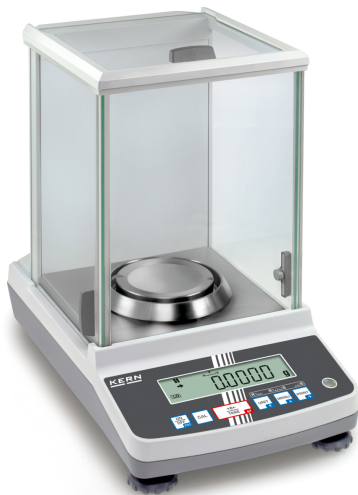

Category

Brand	KERN
Product category	Laboratory balance
Product group	Analytical balance
Product family	ACS

Measuring System

Weighing system	Single-Cell
Weighing capacity [Max]	120 g
USP Minimum weight of sample (k = 2, U = 0.1%)	400 mg
Readability [d]	0,0001 g
Reproducibility	0,0002 g
Linearity	± 0,0003 g
Resolution	1.200.000

Adjustment options	Adjusting with external weight
Recommended adjusting weight	100 g (E2)
Possible calibration points	50 g
Stabilization time	3 s
Eccentric loading at 1/3 [Max]	0,0005 g
Weighing capacity [Max] (ct)	600 ct
Construction type of the scale	Single-range balance

Units	g
	mg
	gn
	dwt
	tl (Tw)
	tl (HK)
	ozt
	tl (Singap, Malays)
	ct
	oz
ffa	

	bat
	m
	PCS
	mom
Maximum creep (15 minutes)	1 mg
Maximum creep (30 minutes)	2 mg
Default unit	g

Display

Display type	LCD
Display type	LCD
Display backlight	no
Display screen size	115×32 mm
Display digit height	14 mm
Languages of the user interface	Symbol language

Construction

Dimension housing (W×D×H)	213×333×338 mm
Dimensions rectangular draught shield - inner (W×D×H)	174×162×227 mm
Dimensions rectangular draught shield - outer (W×D×H)	201×220×256 mm
Dimensions weighing surface (Ø)	91 mm
Dimensions weighing surface	91 mm
Material housing	plastic
Material weighing plate	stainless steel
Material draught shield	glass
Material display housing	plastic
Level indicator	✓
Levelling feet adjustable	✓

Functions

Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	visual
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	120.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	1 mg
Smallest piece weight when piece counting - normal conditions	10 mg
Reference quantity	5, 10, 20, 50, 100

KERN ACS 100-4

KERN

The bestseller in analytical balances, with high-quality single-cell weighing system

Auto-off interval(s) in mains power mode	0 - 99 min
Tare function	manual (multi)
Number of keys for operation	6

Interface

Interfaces	RS-232 standard USB-Device
------------	-------------------------------

Power Supply

Supplied power supply	Power supply unit
Power supply type	Power adapter

Plug-in power supply / adapter for countries - included with the delivery	EURO
	AUS
	UK
	US

Plug-in power supply / adapter for countries - optional	CH
	EURO
	UK
	US

Input voltage power supply / power [Max]	110 V - 230 V AC
--	------------------

Power supply cable removable	removable
------------------------------	-----------

Input voltage device / power [Max]	12 V, 1 A
------------------------------------	-----------

Power socket for mains adapter	Hollow plug, inside minus, Ø outside 5,5 mm, Ø inside 2,1 mm, long 9,5 mm
--------------------------------	---

Environmental conditions

Ambient temperature [Min]	10 °C
---------------------------	-------

Ambient temperature [Max]	30 °C
---------------------------	-------

Humidity of environment [Min]	20 %
-------------------------------	------

Humidity of environment [Max]	85 %
-------------------------------	------

Storage temperature [Min]	-10 °C
---------------------------	--------

Storage temperature [Max]	50 °C
---------------------------	-------

Approval

CE mark	✓
---------	---

Services (optional)

Article number for DAkkS calibration	963-101
--------------------------------------	---------

Article number for certificate of conformity	969-517
--	---------

Packing & Shipping

Delivery time	1 d
---------------	-----

Dimensions packaging (W×D×H)	392×570×520 mm
------------------------------	----------------

Shipping method	Parcel service
-----------------	----------------

Net weight approx.	6 kg
--------------------	------

Gross weight approx.	9 kg
----------------------	------

Shipping weight	23,2 kg
-----------------	---------

Shipping volume weight	23,2 kg
------------------------	---------

Product information

GTIN/EAN number	404576 1235694
-----------------	----------------

Trade number	90160010
--------------	----------

REACH classification	no prohibited substances
----------------------	--------------------------

Pictograms

STANDARD



OPTION

